


EA140BC-2-8 中圧用真鍮メネジソケット

- バルブレス構造なので高粘度の流体に最適
分離時は配管内の流体が外に漏れます。流体を遮断する必要のない経路にご使用ください。
- 本体材質 真鍮(BSBM)



《仕様》	品番	EA140BC-2	EA140BC-3	EA140BC-4	EA140BC-6	EA140BC-8
材質		真鍮	真鍮	真鍮	真鍮	真鍮
サイズ		1/4"	3/8"	1/2"	3/4"	1"
常用圧力(kgf/cm ²)		50	50	50	30	30
最高圧力(kgf/cm ²)		75	75	75	45	45
ゴム材質 使用温度範囲		ニトリルゴム【-20℃~+80℃】				
最大締付けトルク値		90	120	300	500	700

《寸法》

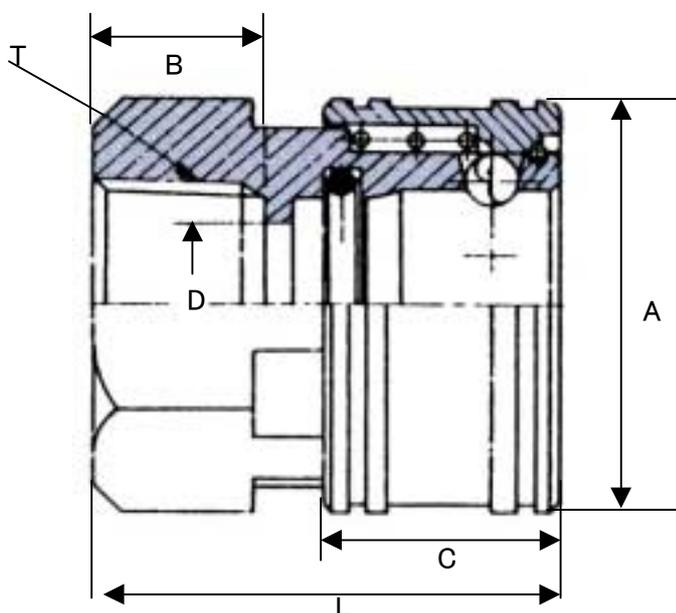

	EA140BC-2	EA140BC-3	EA140BC-4	EA140BC-6	EA140BC-8
L	31.5	35	42	49	59
A	24	28	35	44	57.8
B	12	13	16	19	22
C	16.5	18	20	35	26
D	8	12	15	17	27
T	PT1/4"	PT3/8"	PT1/2"	PT3/4"	PT1"

(接続パターン)

EA140AC-2



EA140AD-2



EA140BC-2



EA140BD-2



EA140BH-2



取り付け方向

流体はソケット側・プラグ側のどちらからでも流せます。

