


【TIN COATED】スパイラルタップ



ねじ立て長さが2D以下の加工で、水溶性切削油剤を使用して
タッピングする低・中炭素鋼、ステンレス鋼に適しています。

●材質:HSSE

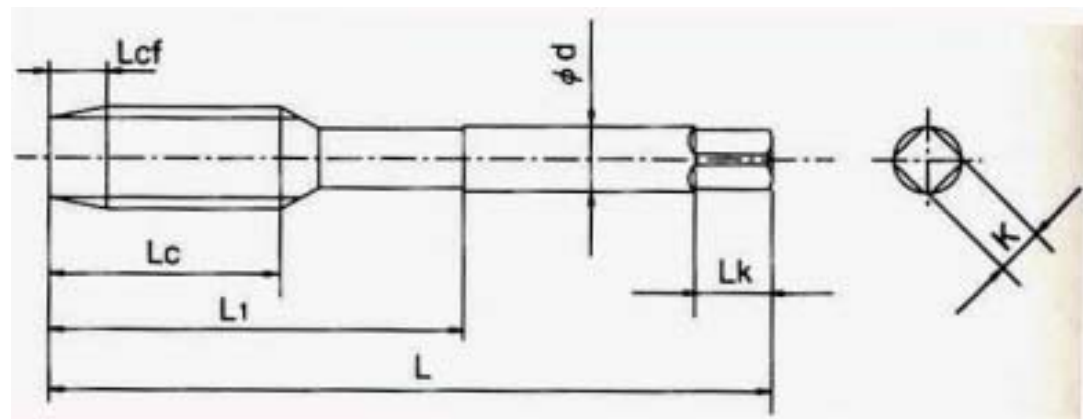

単位:mm

品番	呼び	全長 L	食付 Lcf	ねじ長 Lc	首下長 L1	シャンク径 d	溝数 Flutes	四角部長さ Lk	四角部幅 K
EA829SB-1.4	M1.4×0.3	34mm	2.5P	9	11.5	3	2	5	2.5
EA829SB-1.6	M1.6×0.35	36mm	2.5P	10	13.5	3	2	5	2.5
EA829SB-1.7	M1.7×0.35	36mm	2.5P	11	13.5	3	2	5	2.5
EA829SB-2	M2×0.4	40mm	2.5P	2.8	16	3	2	5	2.5
EA829SB-2.3	M2.3×0.4	42mm	2.5P	2.8	16	3	2	5	2.5
EA829SB-2.5	M2.5×0.45	44mm	2.5P	3.2	16	3	2	5	2.5
EA829SB-2.6	M2.6×0.45	44mm	2.5P	3.2	16	3	2	5	2.5
EA829SB-3	M3×0.5	46mm	2.5P	3.5	19	4	3	6	3.2
EA829SB-3.5	M3.5×0.6	48mm	2.5P	4.2	20	4	3	6	3.2
EA829SB-4	M4×0.7	52mm	2.5P	4.9	21	5	3	7	4
EA829SB-5	M5×0.8	60mm	2.5P	5.6	24	5.5	3	7	4.5
EA829SB-5B	M5×0.5	60mm	2.5P	5.6	24	5.5	3	7	4.5
EA829SB-6	M6×1	62mm	2.5P	7	29	6	3	7	4.5
EA829SB-6B	M6×0.75	62mm	2.5P	7	29	6	3	7	4.5
EA829SB-7	M7×1	65mm	2.5P	7	33	6.2	3	8	5
EA829SB-8	M8×1.25	70mm	2.5P	8.5	37	6.2	3	8	5
EA829SB-8B	M8×1	70mm	2.5P	8.5	37	6.2	3	8	5
EA829SB-10	M10×1.5	75mm	2.5P	10.5	41	7	3	8	5.5
EA829SB-10B	M10×1.25	75mm	2.5P	10.5	41	7	3	8	5.5
EA829SB-10C	M10×1	75mm	2.5P	10.5	41	7	3	8	5.5
EA829SB-10D	M10×0.75	75mm	2.5P	10.5	41	7	3	8	5.5
EA829SB-12	M12×1.75	82mm	2.5P	12	48	8.5	3	9	6.5

EA829SB-12B	M12×1.5	82mm	2.5P	12	48	8.5	3	9	6.5
EA829SB-12C	M12×1.25	82mm	2.5P	12	48	8.5	3	9	6.5
EA829SB-12D	M12×1	82mm	2.5P	12	48	8.5	3	9	6.5
EA829SB-14	M14×2	88mm	2.5P	14	48	10.5	3	11	8
EA829SB-14B	M14×1.5	88mm	2.5P	14	48	10.5	3	11	8
EA829SB-16	M16×2	95mm	2.5P	14	52	12.5	3	13	10
EA829SB-16B	M16×1.5	95mm	2.5P	14	52	12.5	3	13	10
EA829SB-18	M18×2.5	100mm	2.5P	17.5	55	14	4	14	11
EA829SB-18B	M18×1.5	100mm	2.5P	17.5	55	14	4	14	11
EA829SB-20	M20×2.5	105mm	2.5P	17.5	58	15	4	15	12
EA829SB-20B	M20×1.5	105mm	2.5P	17.5	58	15	4	15	12
EA829SB-22	M22×2.5	115mm	2.5P	17.5	63	17	4	16	13
EA829SB-22B	M22×1.5	115mm	2.5P	17.5	63	17	4	16	13
EA829SB-24	M24×3	120mm	2.5P	21	66	19	4	18	15
EA829SB-24B	M24×1.5	120mm	2.5P	21	66	19	4	18	15
EA829SB-30	M30×3.5	135mm	2.5P	24.5	74	23	4	20	17
EA829SB-30B	M30×1.5	135mm	2.5P	24.5	74	23	4	20	17