


[軟鋼・深穴用]スパイラルタップ[ホモ処理]
EA829SF-2～30B

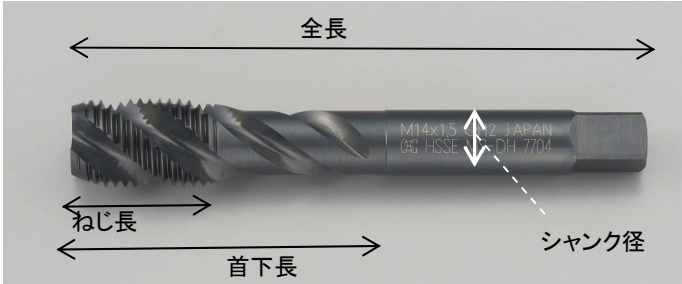

- 材質…高バナジウムハイス(HSSE)
- ホモ処理(表面加工)
- 止り穴で切り屑づまりによるタップの損傷及び、雌ねじのかじり等が発生し易い場合に
- 被削材…低炭素鋼、鋳鋼、中炭素鋼、合金鋼、熱可塑性プラスチック

(単位:mm)

品番	呼び	食付	全長	ねじ長	首下長	シャンク径	溝数
EA829SF-2	M2×0.4	2.5P	40	4	16	3	2
EA829SF-2.3	M2.3×0.4		42	4	16	3	
EA829SF-2.5	M2.5×0.45		44	4.5	16	3	
EA829SF-2.6	M2.6×0.45		44	4.5	16	3	
EA829SF-3	M3×0.5		46	5	19	4	
EA829SF-3.5	M3.5×0.6		48	6	20	4	3
EA829SF-4	M4×0.7		52	7	21	5	
EA829SF-5	M5×0.8		60	8	24	5.5	
EA829SF-6	M6×1		62	10	29	6	
EA829SF-8	M8×1.25		70	13	37	6.2	
EA829SF-10	M10×1.5		75	15	41	7	
EA829SF-10B	M10×1.25						
EA829SF-12	M12×1.75		82	18	48	8.5	
EA829SF-12B	M12×1.5						
EA829SF-12C	M12×1.25						
EA829SF-14	M14×2		88	20	48	10.5	
EA829SF-14B	M14×1.5						
EA829SF-16	M16×2		95	20	52	12.5	
EA829SF-16B	M16×1.5						
EA829SF-18	M18×2.5		100	25	55	14	4
EA829SF-18B	M18×1.5						
EA829SF-20	M20×2.5		105	25	58	15	
EA829SF-20B	M20×1.5						
EA829SF-22	M22×2.5		115	25	63	17	
EA829SF-22B	M22×1.5						
EA829SF-24	M24×3		120	30	66	19	
EA829SF-24B	M24×1.5						
EA829SF-27	M27×3		130	30	71	20	
EA829SF-27B	M27×1.5						
EA829SF-30	M30×3.5		135	35	74	23	
EA829SF-30B	M30×1.5						

ミリサイズタップ四角部幅サイズ表

呼び	シャンク径φ	四角部幅	呼び	シャンク径φ	四角部幅	呼び	シャンク径φ	四角部幅
M1～M2	3	2.5	M14～M15	10.5	8	M28	21	17
M3	4	3.2	M16	12.5	10	M30	23	
M4	5	4	M17	13		M32	24	
M5	5.5	4.5	M18～M19	14	11	M33	25	19
M6	6		M20	15	12	M34～M35	26	
M7～M8	6.2	5	M21	16		M36～M38	28	21
M9～M10	7	5.5	M22	17	13	M39～M40	30	
M11	8	6	M23	18	14	M42	32	26
M12	8.5	6.5	M24～M25	19	15	M45	35	
M13	9.5	7	M26～M27	20				

サイズ(mm)