


EA948DN-1～-63
(パッド付スラストボルト)



○ 材質 S45C
 処理 焼入・焼戻 黒染め
 高周波焼入(先端部)



使用例・使用方法

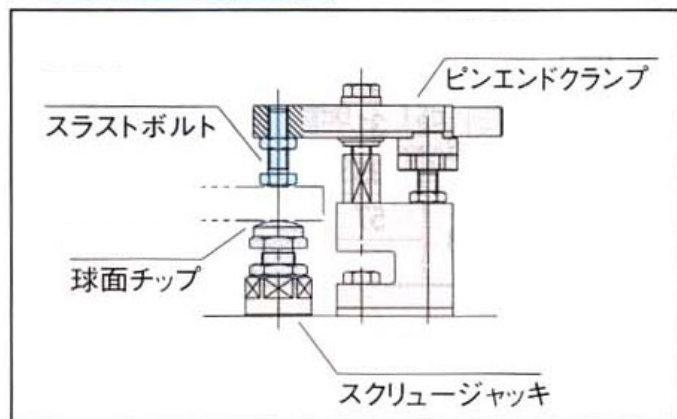

クランプヘッド、サポートヘッドに。

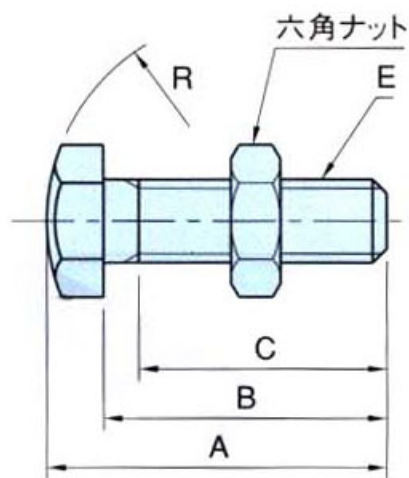

	A	B	C	D	E	R	重量(g)
DN-1	30	25	22				7
DN-2	40	35	32	10	M6X1	R15	9
DN-3	50	45	42				11
DN-11	36	30	27				16
DN-12	46	40	37	13	M8X1.25	R17.5	19
DN-13	56	50	47				22
DN-21	48	40	37				33
DN-22	58	50	47	17	M10X1.5	R20	38
DN-23	68	60	57				42
DN-31	50	40	35				60
DN-32	70	60	55	19	M12X1.75	R30	65
DN-33	80	70	65				70
DN-41	55	45	40				110
DN-42	75	65	60	24	M16X2	R35	125
DN-43	85	75	70				135
DN-51	75	60	50				205
DN-52	90	75	65	30	M20X2.5	R40	235
DN-53	105	90	80				265
DN-61	78	60	50				325
DN-62	98	80	70	36	M24X3	R45	380
DN-63	118	100	90				430

(単位mm)