


EA538ML-1ー～ー12 [CB形]裸圧着端子

- ◆丸型(R型)
- ◆材料…端子:無酸素銅(電気すずめっき)  
スリーブ:無酸素銅管(電気すずめっき)
- ◆低圧開閉器用

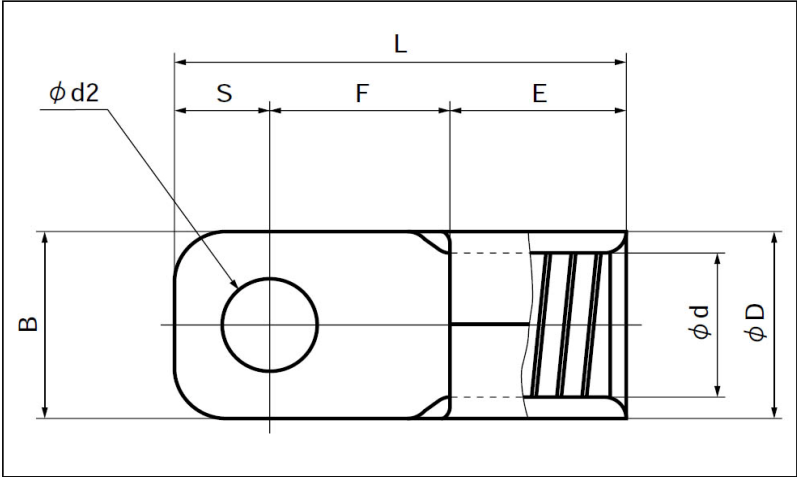

| 品番         | 型式       | 各部の寸法 |      |      |      |      |      |      |      | 電線抱合範囲            |            | 注) |  |
|------------|----------|-------|------|------|------|------|------|------|------|-------------------|------------|----|--|
|            |          | φ d2  | B    | L    | S    | F    | E    | φ D  | φ d  | 撚線mm <sup>2</sup> | AWG        |    |  |
| EA538ML-1  | CB22-6S  | 6.4   | 12.5 | 31.0 | 5.5  | 13.5 | 12.0 | 11.5 | 7.7  | 16.78～26.66       | 4          | ○  |  |
| EA538ML-2  | CB22-8S  | 8.2   |      |      | 6.4  | 12.6 |      |      |      |                   |            |    |  |
| EA538ML-3  | CB38-5S  | 5.3   | 13.5 | 36.8 | 7.5  | 16.4 | 13.0 | 13.3 | 9.4  | 26.66～42.42       | 2          |    |  |
| EA538ML-4  | CB-38-6S | 6.4   |      |      |      |      |      |      |      |                   |            |    |  |
| EA538ML-5  | CB-60-8  | 8.4   | 16.0 | 46.5 | 8.0  | 20.0 | 18.5 | 15.5 | 11.4 | 42.42～60.57       | 1/0        | ▲○ |  |
| EA538ML-6  | CB60-10S | 10.5  |      | 49.5 | 11.0 |      |      |      |      |                   |            | ○  |  |
| EA538ML-7  | CB80-8   | 8.4   | 22.0 | 50.0 | 11.0 |      | 19.0 | 19.5 | 14.5 | 76.28～96.3        | 3/0        | ▲  |  |
| EA538ML-8  | CB80-10  | 10.5  |      |      |      |      |      |      |      |                   |            |    |  |
| EA538ML-9  | CB100-8  | 8.4   |      | 52.0 |      | 21.0 | 20.0 | 22.3 | 16.4 | 96.3～117.2        | 4/0        |    |  |
| EA538ML-10 | CB100-10 | 10.5  |      |      |      |      |      |      |      |                   |            |    |  |
| EA538ML-11 | CB150-8S | 8.4   | 25.0 | 61.3 | 12.0 | 22.3 | 27.0 | 26.5 | 19.5 | 117.2～152.05      | 250～300MCM | -  |  |
| EA538ML-12 | CB150-10 | 10.5  |      | 61.8 | 12.5 |      |      |      |      |                   |            | ▲  |  |

注) ▲: JEM規格該当品(日本電機工業会規格)      ○: UL、CSA登録品

- ◆取得規格
  - ・UL486A(WIRE CONNECTORS AND SOLDERING LUGS FOR COPPER CONDUCTORS)に適合
  - ・UL ファイルNo.E44245にて承認
  - ・CSA C22.2(CONSTRUCTION AND TEST OF WIRE CONNECTORS)に適合
  - ・CSA ファイルNo.LR-28418にて承認