


EA951CU-1~8 スプリング入丁番



CU-1,-2



CU-5,-6

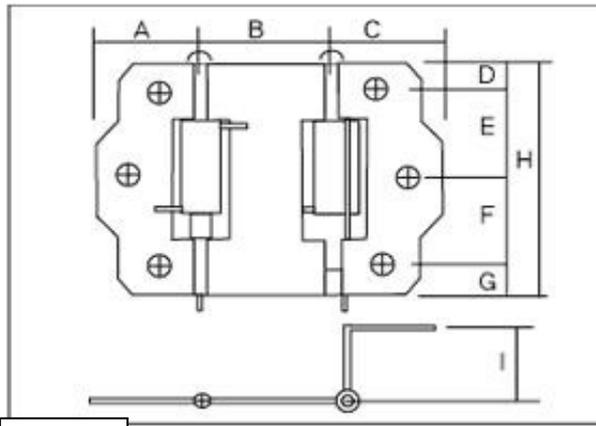

両開き※

※ビス付

(単位:mm)

品番	A	B	C	D	E	F	G	H	I	板厚
EA951CU-1	22	30	22	7.5	24.5	24.5	7.5	65	28	1.3
EA951CU-2	22	30	22	10.5	27	27	10.5	75	28	1.2
EA951CU-5	22	30	22	7.5	24.5	24.5	7.5	65	28	1.3
EA951CU-6	22	30	22	10.5	27	27	10.5	75	28	1.2


品番	材質	耐荷重 (2枚使用時)
EA951CU-1	スチール	3kg
EA951CU-2		5kg
EA951CU-5	SUS304	3kg
EA951CU-6		5kg




CU-3,-4



CU-7,-8

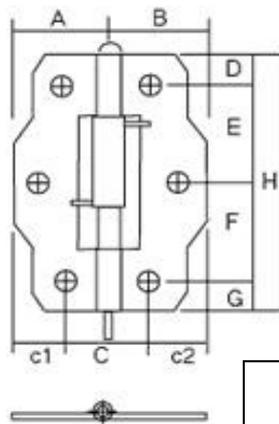

片開き

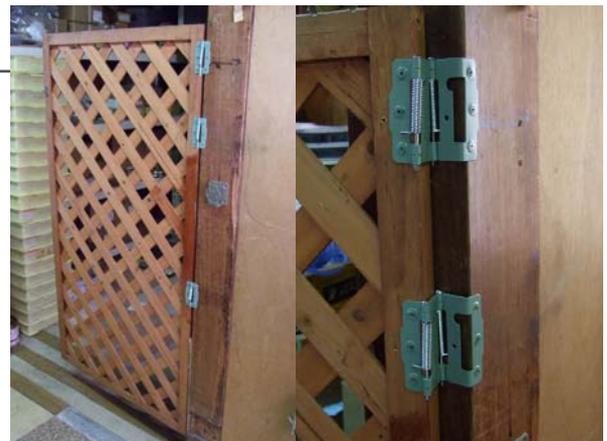

仕組んであるバネの効力により、常に扉が閉じている状態を保つ事ができます。

品番	A	B	c1	C	c2	D	E	F	G	H	I
EA951CU-3	22	23	10	25	10	8	24	24	8	65	61
EA951CU-4	23	23	10	25	10	10.5	27.5	27.5	10.5	75	76
EA951CU-7	22	23	10	25	10	8	24	24	8	65	61
EA951CU-8	23	23	10	25	10	10.5	27.5	27.5	10.5	75	76

品番	材質	耐荷重	板厚
EA951CU-3	スチール	3kg	1.2
EA951CU-4		5kg	
EA951CU-7	SUS304	3kg	1.2
EA951CU-8		5kg	