


[ステンレス用]スパイラルタップ[ホモ処理]
EA829SE-3～30B

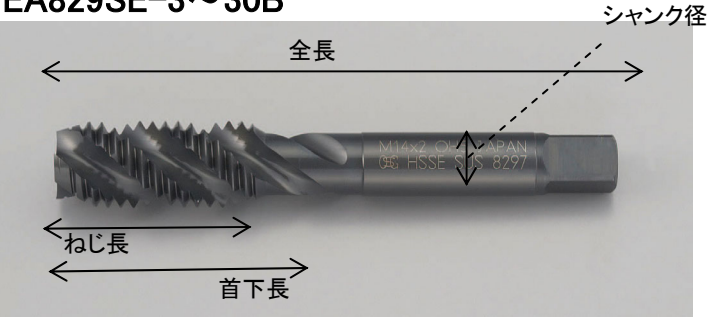

- 材質…高バナジウムハイス(HSSE)
- ホモ処理(表面処理)
- 止まり穴のステンレス鋼、銅、熱可塑性プラスチックに

(単位:mm)

品番	呼び	食付	全長	ねじ長	首下長	シャンク径	溝数
EA829SE-3	M3×0.6	2.5P	46	11	19	4	3
EA829SE-3B	M3×0.5						
EA829SE-3.5	M3.5×0.6		48	13	20	4	
EA829SE-4	M4×0.75		52	13	21	5	
EA829SE-4B	M4×0.7						
EA829SE-5	M5×0.9		60	16	24	5.5	
EA829SE-5B	M5×0.8						
EA829SE-6	M6×1		62	19	29	6	
EA829SE-8	M8×1.25		70	22	37	6.2	
EA829SE-8B	M8×1						
EA829SE-10	M10×1.5		75	24	41	7	
EA829SE-10B	M10×1.25						
EA829SE-10C	M10×1						
EA829SE-12	M12×1.75		82	29	48	8.5	
EA829SE-12B	M12×1.5						
EA829SE-12C	M12×1.25						
EA829SE-12D	M12×1						
EA829SE-14	M14×2		88	30	48	10.5	
EA829SE-14B	M14×1.5						
EA829SE-16	M16×2		95	32	52	12.5	
EA829SE-16B	M16×1.5						
EA829SE-18	M18×2.5		100	37	55	14	4
EA829SE-18B	M18×1.5						
EA829SE-20	M20×2.5		105	37	58	15	
EA829SE-20B	M20×1.5						
EA829SE-22	M22×2.5		115	38	63	17	
EA829SE-22B	M22×1.5						
EA829SE-24	M24×3		120	45	66	19	
EA829SE-24B	M24×1.5						
EA829SE-27	M27×3		130	45	71	20	
EA829SE-27B	M27×1.5						
EA829SE-30	M30×3.5		135	48	74	23	
EA829SE-30B	M30×1.5						

ミリサイズタップ四角部幅サイズ表

呼び	シャンク径φ	四角部幅	呼び	シャンク径φ	四角部幅	呼び	シャンク径φ	四角部幅
M1～M2	3	2.5	M14～M15	10.5	8	M28	21	17
M3	4	3.2	M16	12.5	10	M30	23	
M4	5	4	M17	13		M32	24	19
M5	5.5	4.5	M18～M19	14	11	M33	25	
M6	6		M20	15	12	M34～M35	26	21
M7～M8	6.2	5	M21	16		M36～M38	28	
M9～M10	7	5.5	M22	17	13	M39～M40	30	23
M11	8	6	M23	18	14	M42	32	26
M12	8.5	6.5	M24～M25	19	15	M45	35	
M13	9.5	7	M26～M27	20				

サイズ(mm)